


LTF型 φ40 50 65 75

自在車	固定車
プレート式	ねじ込み式
三価ユニクロ仕上	クロームメッキ仕上
シングルベアリング	ダブルベアリング
シングルストッパー	ダブルストッパー




・図面

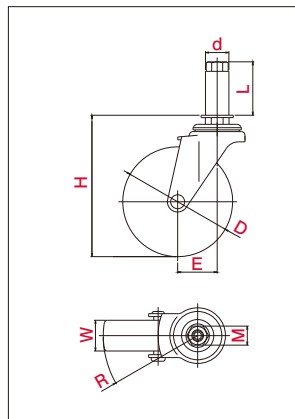

※写真は代表的な製品イメージです。

・取付方法〔差し込み式〕

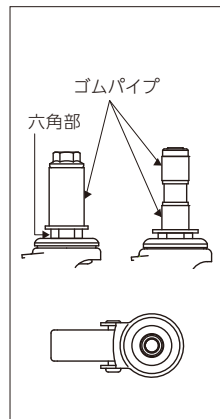

・主な使用例



品番	車輪	車輪径 D (mm)	車幅 W (mm)	取付高 H (mm)	パイプ径 d (mm)	軸長 L (mm)	対辺 M (mm)	偏心 E (mm)	旋回半径 R (mm)	許容荷重 [daN (kgf)]
LTF-40R, φ16		40	17	60	16	38	14	21	41	20(20.4)
LTF-40R, φ18					18					
LTF-40R, φ22					22					
LTF-40R, φ24P					24					
LTF-50R, φ16		50	20	70	16			22	47	30(30.6)
LTF-50R, φ18					18					
LTF-50R, φ22					22					
LTF-50R, φ24P					24					
LTF-65RH, φ16		65	21	87	16			23	56	40(40.8)
LTF-65RH, φ18					18					
LTF-65RH, φ22					22					
LTF-65RH, φ24P					24					
LTF-75RH, φ16		75	21	97	16			27	65	50(51.0)
LTF-75RH, φ18					18					
LTF-75RH, φ22					22					
LTF-75RH, φ24P					24					
LTF-40N, φ16		40	18	60	16	38	14	21	42	30(30.6)
LTF-40N, φ18					18					
LTF-40N, φ22					22					
LTF-40N, φ24P					24					
LTF-50N, φ16		50	21	70	16			22	47	40(40.8)
LTF-50N, φ18					18					
LTF-50N, φ22					22					
LTF-50N, φ24P					24					
LTF-65N, φ16		65	21	87	16			23	56	50(51.0)
LTF-65N, φ18					18					
LTF-65N, φ22					22					
LTF-65N, φ24P					24					
LTF-75N, φ16		75	21	97	16			27	65	50(51.0)
LTF-75N, φ18					18					
LTF-75N, φ22					22					
LTF-75N, φ24P					24					

・専用工具 14平スパナ

LIGHT STAR (軽荷重向け) / L-type LTF 型

品 番	車 輪	 車輪径 D (mm)	 車 幅 W (mm)	 取付高 H (mm)	 パイプ径 d (mm)	 軸 長 L (mm)	 対 辺 M (mm)	 偏 心 E (mm)	 旋回半径 R (mm)	 許容荷重 [daN (kgf)]
LTF-40BN, φ 16	 ホイル:ナイロン(黒) 車 輪:ナイロン(黒)	40	18	60	16	38	14	21	42	30(30.6)
LTF-40BN, φ 18					18					
LTF-40BN, φ 22					22					
LTF-40BN, φ 24P					24					
LTF-50BN, φ 16		50		70	16			22	47	40(40.8)
LTF-50BN, φ 18					18					
LTF-50BN, φ 22					22					
LTF-50BN, φ 24P					24					
LTF-65BN, φ 16		65	21	87	16			23	56	
LTF-65BN, φ 18					18					
LTF-65BN, φ 22					22					
LTF-65BN, φ 24P					24					
LTF-75BN, φ 22		75		97	22			27	65	50(51.0)
LTF-75BN, φ 16					16					
LTF-75BN, φ 18					18					
LTF-75BN, φ 24P					24					
LTF-50RE, φ 16	 ホイル:導電ゴム 車 輪:導電ゴム	50	20	70	16	38	14	22	47	30(30.6)
LTF-50RE, φ 18					18					
LTF-50RE, φ 22					22					
LTF-50RE, φ 24P					24					
LTF-65RHE, φ 16		65	21	87	16			23	56	
LTF-65RHE, φ 18					18					
LTF-65RHE, φ 22					22					
LTF-65RHE, φ 24P					24					
LTF-75RHE, φ 16		75		97	16			27	65	50(51.0)
LTF-75RHE, φ 18					18					40(40.8)
LTF-75RHE, φ 22					22					
LTF-75RHE, φ 24P					24					
LTF-65EL, φ 16	 ホイル:PP 車 輪:エラストマー	65	21	87	16	38	14	23	56	30(30.6)
LTF-65EL, φ 18					18					
LTF-65EL, φ 22					22					
LTF-65EL, φ 24P					24					
LTF-75EL, φ 16		75		97	16			27	65	
LTF-75EL, φ 18					18					
LTF-75EL, φ 22					22					
LTF-75EL, φ 24P					24					
LTF-65UR, φ 16	 ホイル:ナイロン 車 輪:ウレタン	65	21	87	16	38	14	23	56	35(35.7)
LTF-65UR, φ 18					18					
LTF-65UR, φ 22					22					
LTF-65UR, φ 24P					24					
LTF-75UR, φ 16		75		97	16			27	65	45(45.9)
LTF-75UR, φ 18					18					
LTF-75UR, φ 22					22					
LTF-75UR, φ 24P					24					

ホイル:ナイロン(黒)
車 輪:ナイロン(黒)

ホイル:導電ゴム
車 輪:導電ゴム

ホイル:PP
車 輪:エラストマー

ホイル:ナイロン
車 輪:ウレタン