
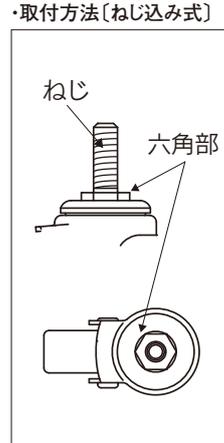


LT-S型 $\phi 40 50 65 75$

自在車	固定車
プレート式	ねじ込み式 差し込み式
三価ユニクロ仕上	クロームメッキ仕上
シングルベアリング	ダブルベアリング
シングルストッパー	ダブルストッパー

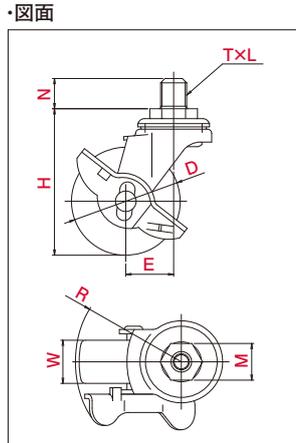

※写真は代表的な製品イメージです。

品番	車輪	車輪径 D (mm)	車幅 W (mm)	取付高 H (mm)	ねじ T	ピッチ・山数 L	長さ N (mm)	対辺 M (mm)	偏心 E (mm)	旋回半径 R (mm)	許容荷重 [daN (kgf)]	
LT-40RS,M12×14		40	17	59	M12	1.25	14	19	21	50	25(25.5)	
LT-40RS,UNF1/2×14					UNF1/2	20		21				
LT-40RS,W3/8×14					W3/8	16		17				
LT-50RS,M12×14		50	20	68	M12	1.25	14	19	22	49	30(30.6)	
LT-50RS,UNF1/2×14					UNF1/2	20		21				
LT-50RS,W3/8×14					W3/8	16		17				
LT-65RHS,M12×14		65	21	85	M12	1.25	35	19	23	57	40(40.8)	
LT-65RHS,M12×35					M12	1.75		35				19
LT-65RHS,UNF1/2×14					UNF1/2	20		21				
LT-65RHS,W3/8×14		75	21	95	W3/8	16	14	17	27	65	35(35.7)	
LT-75RHS,M12×14					M12	1.25		19				
LT-75RHS,M12×35					M12	1.75		35				19
LT-75RHS,UNF1/2×14	ホイルゴム 車輪ゴム	75	95	UNF1/2	20	14	21	27	65	50(50.0)		
LT-75RHS,W3/8×14				W3/8	16		17					
LT-40NS,M12×14					40		18				59	M12
LT-40NS,UNF1/2×14	UNF1/2	20	21									
LT-40NS,W3/8×14	W3/8	16	17									
LT-50NS,M12×14	50	21	68		M12	1.25	35	19	22	49	40(40.8)	
LT-50NS,UNF1/2×14					UNF1/2	20		21				
LT-50NS,W3/8×14					W3/8	16		17				
LT-65NS,M12×14	65	21	85		M12	1.25	14	19	23	57	50(50.0)	
LT-65NS,M12×35					M12	1.75		35				19
LT-65NS,UNF1/2×14					UNF1/2	20		21				
LT-65NS,W3/8×14	75	21	95		W3/8	16	14	17	27	65	35(35.7)	
LT-75NS,M12×14					M12	1.25		19				
LT-75NS,M12×35					M12	1.75		35				19
LT-75NS,UNF1/2×14	ホイルナイロン 車輪/ナイロン	75	95	UNF1/2	20	14	21	27	65	50(50.0)		
LT-75NS,W3/8×14				W3/8	16		17					

・専用工具 17平スパナ ユーエイスパナ(19mm/21mm)

LIGHT STAR (軽荷重向け) / L-type LT-S型

品番	車輪	車輪径 D(mm)	車幅 W(mm)	取付高 H(mm)	ねじ T	ピッチ・山数 L	長さ N(mm)	対辺 M(mm)	偏心 E(mm)	旋回半径 R(mm)	許容荷重 [daN (kgf)]	
LT-40BNS,M12×14		40	18	59	M12	1.25	14	19	21	50	30(30.6)	
LT-40BNS,UNF1/2×14					UNF1/2	20		21				
LT-40BNS,W3/8×14					W3/8	16		17				
LT-50BNS,M12×14		50	21	68	M12	1.25	14	19	22	49		
LT-50BNS,UNF1/2×14					UNF1/2	20		21				
LT-50BNS,W3/8×14					W3/8	16		17				
LT-65BNS,M12×14		65	21	85	M12	1.25	35	19	23	57		35(35.7)
LT-65BNS,M12×35					UNF1/2	20		21				
LT-65BNS,W3/8×14					W3/8	16		17				
LT-65BNS,UNF1/2×14					UNF1/2	20	21					
LT-65BNS,W3/8×14					W3/8	16	14	17				
LT-65BNS,M12×14					M12	1.25	19					
LT-65BNS,M12×35	UNF1/2	20	21									
LT-65BNS,W3/8×14	W3/8	16	14	17								
LT-75BNS,M12×14	75	21	95	M12	1.25	35	19	27	65	50(51.0)		
LT-75BNS,M12×35				UNF1/2	20		21					
LT-75BNS,UNF1/2×14				UNF1/2	20	14	17					
LT-75BNS,W3/8×14				W3/8	16	14	17					
LT-50RES,M12×14		50	20	68	M12	1.25	14	19	22	49	30(30.6)	
LT-50RES,UNF1/2×14					UNF1/2	20		21				
LT-50RES,W3/8×14					W3/8	16		17				
LT-65RHES,M12×14		65	21	85	M12	1.25	35	19	23	57		
LT-65RHES,M12×35					UNF1/2	20		21				
LT-65RHES,UNF1/2×14					UNF1/2	20		14				17
LT-65RHES,W3/8×14		W3/8	16	14	17							
LT-75RHES,M12×14		75	21	95	M12	1.25	35	19	27	65		40(40.8)
LT-75RHES,M12×35					UNF1/2	20		21				
LT-75RHES,UNF1/2×14					UNF1/2	20	14	17				
LT-75RHES,W3/8×14					W3/8	16	14	17				
LT-65ELS,M12×14			65	21	85	M12	1.25	35	19	23		57
LT-65ELS,M12×35	UNF1/2					20	21					
LT-65ELS,UNF1/2×14	UNF1/2					20	14	17				
LT-65ELS,W3/8×14	W3/8					16	14	17				
LT-75ELS,M12×14	75		21	95	M12	1.25	35	19	27	65		
LT-75ELS,M12×35					UNF1/2	20		21				
LT-75ELS,UNF1/2×14					UNF1/2	20	14	17				
LT-75ELS,W3/8×14					W3/8	16	14	17				
LT-65URS,M12×14		65	21	85	M12	1.25	35	19	23	57	40(40.8)	
LT-65URS,M12×35					UNF1/2	20		21				
LT-65URS,UNF1/2×14					UNF1/2	20	14	17				
LT-65URS,W3/8×14					W3/8	16	14	17				
LT-75URS,M12×14		75	21	95	M12	1.25	35	19	27	65	45(45.9)	
LT-75URS,M12×35					UNF1/2	20		21				
LT-75URS,UNF1/2×14					UNF1/2	20	14	17				
LT-75URS,W3/8×14					W3/8	16	14	17				

ホイル:ナイロン(黒)
車輪:ナイロン(黒)ホイル:導電ゴム
車輪:導電ゴムホイル:PP
車輪:エラストマーホイル:ナイロン
車輪:ウレタン