

LOCKSTAR (台車固定機能付) / OTHER-type

ELOCK 型 $\phi 60$ 75 100 150 200

自在車	固定車	
プレート式	ねじ込み式	差し込み式
三価ユニクロ仕上	クロームメッキ仕上	
シングルベアリング	ダブルベアリング	
シングルストッパー	ダブルストッパー	



ELOCK-75

ELOCK-200


・主な使用例



※写真は代表的な製品イメージです。

品 番	 パッド径 D (mm)	 適正取付高さ (mm)	 DOWN高さ H1 (mm)	 UP高さ H2 (mm)	 ストローク S (mm)	 取付座 A×B (mm)	 取付寸法 X×Y (mm)	 穴 径 P (mm)	 ペダル長さ L1 (mm)	 取付座端面からのペダル長さ L2 (mm)	 取付座よりの隙間 (mm)
ELOCK-65	60	85	90	75	15	105×135	67×103	10.5	93	53	−1.25
ELOCK-75		90	95	80							
ELOCK-100(H130)	78	130	135	117	18	120×120	100×100 (85×85)	11	127	87	−1.65
ELOCK-100		144	150	132	18				143	103	
ELOCK-150		198	210	160	50				156	115	14
ELOCK-200		250	258	208							

・図面〔ELOCK-65・75〕

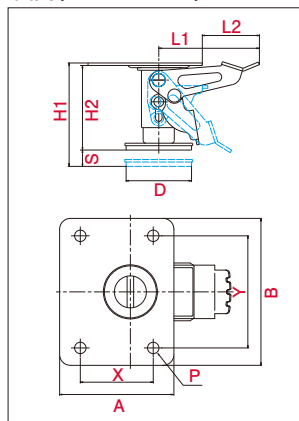

・図面〔ELOCK-100・150・200〕

